



# SELECTIVE PALLET RACK






## General Characteristics of Selective Pallet Rack

---


Combining vertical frames with horizontal load beams, Interlake Mecalux Selective Pallet Rack provides total accessibility to the product. Both popular and durable, this racking system provides versatility for warehouses that have wide varieties of product types. It is manufactured from high-strength steel and other quality raw materials, which are certified to meet our stringent specifications.

Interlake Mecalux Selective Pallet Rack is roll formed and available with bolted or welded frame configurations. Beams are mounted to the frame and held in place with a piston lock connector. This allows the beams to be seated securely without the risk of accidental disengagement and enables easy arrangement when necessary.



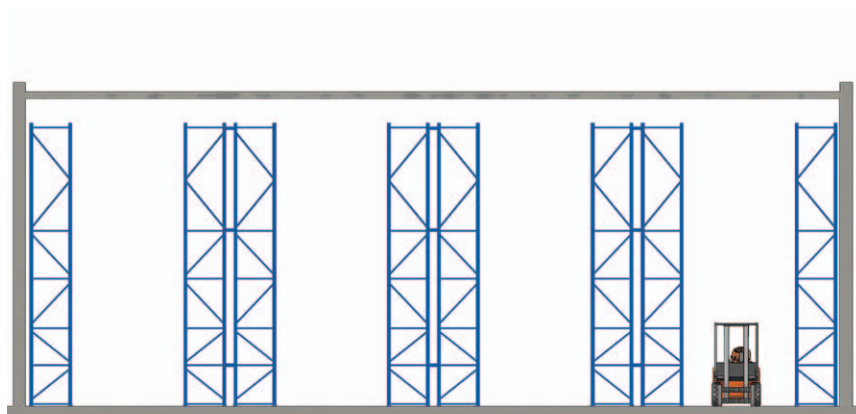


Single deep Selective system

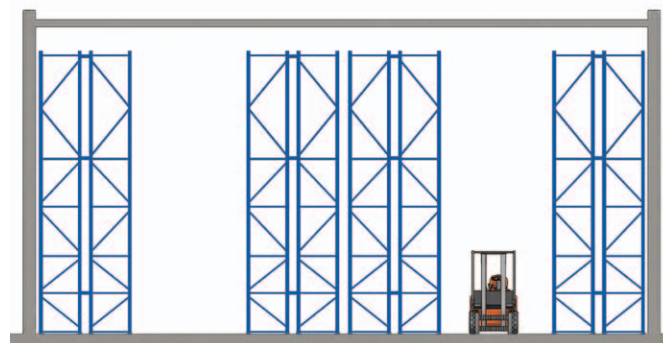

Double deep Selective system


## Layout options within the Selective Pallet Rack system

You will want to choose between a single and a double deep system configuration by first determining the variety of SKUs being stored. High volumes of a limited number of products will more likely require a double deep system that has enough capacity to store two pallets deep by reducing the number of forklift access points. The double racking or back to back racking of the single deep system is designed to allow forklifts easier access to a larger number of SKU's stored at half the pallet depth. With either system, you'll want to utilize a forklift with the weight and reach capacity appropriate to your storage application.

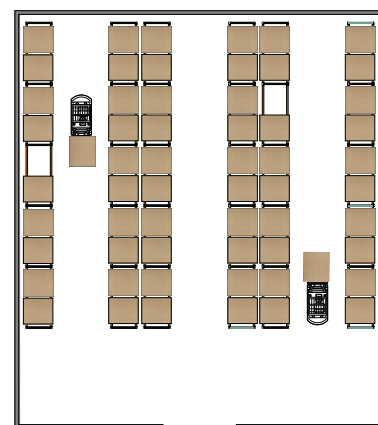

Typical Selective floorplan



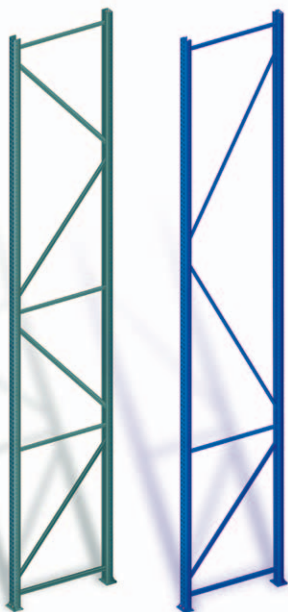


## Frames

Standard frames consist of two posts, horizontal and diagonal struts, and foot plates. Hole punches for beam insertion are placed along the post in 2" intervals. Posts are available in a variety of gauges, lengths, configurations for seismic zones and bracing patterns made to be more resistant to twisting, separating and axial loading.


The capacities shown are:

- applicable for non-seismic use only.
- shown in pounds (lbs) and for product load plus dead load (dead load = 2.0% of product load).
- only valid when used with Interlake Mecalux published beam sizes.
- accurate for static loads only.







**U77 = 15 ga**



**U80 = 14 ga  
U82 = 12 ga**




**U101 = 13 ga**




**U122 = 12 ga**

<b>BOLTED POST CAPACITY<sup>(2)</sup> (lbs)</b>					
<b>Maximum Unsupported Length<sup>(1)</sup></b>	<b>U77</b>	<b>U80</b>	<b>U82</b>	<b>U101</b>	<b>U122</b>
	0.067" thick	0.070" thick	0.105" thick	0.090" thick	0.105" thick
	15 Gauge	14 Gauge	12 Gauge	13 Gauge	12 Gauge
36"	20,930	26,520	38,820	36,440	47,880
42"	20,930	25,880	37,800	36,440	47,880
48"	19,980	24,540	35,480	36,440	47,880
54"	18,710	23,040	33,120	35,060	47,880
60"	17,290	21,360	30,360	33,480	47,500
66"	15,730	19,500	27,560	31,740	45,600
72"	14,010	17,460	24,680	29,820	43,700
78"	12,150	15,260	21,420	27,760	41,600
84"	10,480	13,160	18,480	25,520	39,380
90"	9,130	11,460	16,100	23,120	37,040
96"	8,020	10,080	14,140	20,540	34,560

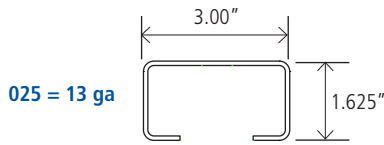


**025 = 13 ga**

**070 = 14 ga  
075 = 13 ga  
077 = 12 ga  
079 = 11 ga**



**095 = 13 ga  
099 = 11 ga**



<b>WELDED POST CAPACITY<sup>(2)</sup> (lbs)</b>							
<b>Maximum Unsupported Length<sup>(1)</sup></b>	<b>025</b>	<b>070</b>	<b>075</b>	<b>077</b>	<b>079</b>	<b>095</b>	<b>099</b>
	0.090" thick	0.070" thick	0.090" thick	0.105" thick	0.120" thick	0.090" thick	0.120" thick
	13 Gauge	14 Gauge	13 Gauge	12 Gauge	11 Gauge	13 Gauge	11 Gauge
36"	23,400	28,600	38,400	44,300	50,000	37,500	60,200
42"	21,900	25,900	34,600	39,800	44,900	37,500	60,200
48"	19,300	23,000	30,600	35,200	39,700	36,300	57,900
54"	16,700	20,000	26,400	30,400	34,300	33,900	53,200
60"	15,000	17,700	23,100	26,600	30,000	31,300	48,400
66"	13,400	16,000	20,900	24,000	27,100	28,500	43,500
72"	11,700	14,400	18,700	21,400	24,100	25,800	38,700
78"	10,300	12,800	16,500	19,000	21,300	23,200	34,500
84"	9,100	11,400	14,700	16,900	19,000	21,700	31,900
90"	8,000	10,200	13,100	15,100	16,900	20,100	29,400
96"	7,100	9,200	11,800	13,500	15,200	18,600	26,800

All posts are cold roll formed using 55,000 P.S.I. minimum yield steel and have been designed to meet RMI specifications.

(1) Maximum unsupported length is measured from the floor to the top of the first beam to top of beam; use the larger of these dimensions.

(2) These capacities assume that all component parts are: a. Manufactured by Interlake Mecalux. b. In good condition. c. Properly maintained.





## Beams


Load beams are roll formed with a 1-5/8" step along the top inside edge for holding load support components such as pallet supports or wire decks. Capacities are for uniformly distributed product load plus dead load per pair of beams (dead load = weight of beams) and are applicable for non-seismic use only.

### Slotted and Unslotted Beams

Beams can be slotted on the step ledge at 1" centers as an option. Slots allow the penetration of a fabricated tab to restrict the horizontal movement of a crossbar (pallet support). Due to the manufacturing process, slot cut-off points are random at the end of each beam. All beams receive two solid coats of paint on every surface and are then oven baked.





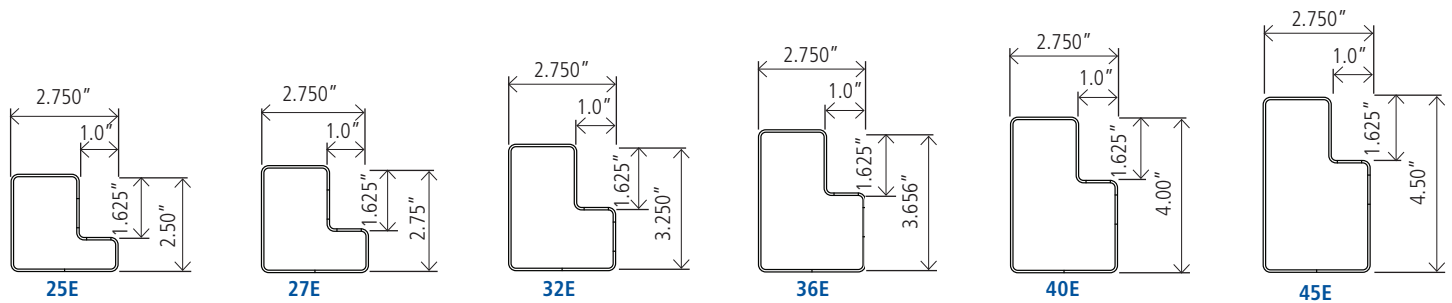


Slotted and Unslotted Step Beam Capacity <sup>(2,3)</sup> (lbs per pair)												
Span <sup>(1)</sup>	25E	27E	32E	36E	40E	45E	47E	50E	55E	59E	65E	65Q
48"	4,370	5,020	6,590	7,770	8,840	10,540	11,580	12,470	14,470	15,120	15,120	15,120
54"	3,910	4,490	5,910	6,950	7,910	9,410	10,350	11,140	12,910	14,480	15,120	15,120
60"	3,550	4,060	5,370	6,300	7,160	8,510	9,360	10,070	11,660	13,080	15,120	15,120
66"	3,380	4,110	5,450	6,390	7,250	8,600	9,470	10,180	11,790	13,210	15,120	15,120
72"	2,870	3,560	5,040	5,890	6,680	7,920	8,720	9,380	10,850	12,150	14,190	15,120
78"	2,470	3,060	4,690	5,480	6,200	7,340	8,090	8,690	10,050	11,250	13,140	15,120
84"	2,150	2,660	4,120	5,120	5,790	6,850	7,550	8,110	9,370	10,480	12,230	15,120
90"	1,900	2,340	3,630	4,660	5,430	6,420	7,080	7,600	8,780	9,820	11,450	15,120
96"	1,690	2,080	3,230	4,130	5,030	6,040	6,670	7,160	8,260	9,230	10,770	14,350
102"	1,510	1,860	2,900	3,690	4,490	5,710	6,310	6,760	7,810	8,200	10,160	13,530
108"	1,360	1,670	2,620	3,330	4,040	5,260	5,990	6,420	7,400	8,260	9,620	12,810
114"	1,240	1,520	2,380	3,020	3,660	4,750	5,540	6,100	7,040	7,850	9,140	12,170
120"	1,130	1,380	2,170	2,750	3,330	4,320	5,030	5,630	6,710	7,480	8,710	11,580
126"	1,040	1,270	1,990	2,520	3,040	3,940	4,600	5,140	6,350	7,080	8,240	10,950
132"	960	1,170	1,840	2,320	2,800	3,620	4,220	4,710	5,910	6,780	7,890	10,480
138"	890	1,080	1,700	2,140	2,580	3,330	3,890	4,340	5,440	6,460	7,570	10,040
144"	830	1,010	1,590	1,990	2,400	3,080	3,600	4,020	5,020	5,970	7,270	9,650
150"	-	-	-	-	-	-	3,340	3,730	4,660	5,530	7,000	9,050
156"	-	-	-	-	-	-	3,120	3,470	4,330	5,140	6,530	8,410
162"	-	-	-	-	-	-	2,910	3,240	4,050	4,790	6,080	7,830
168"	-	-	-	-	-	-	2,730	3,040	3,790	4,480	5,690	7,310

(1) Beams longer than 90" that support decking must be tied together to prevent spreading. Beams over 108" long should have an extra lateral support installed mid-span.

(2) These capacities assume that all component parts are: a. Manufactured by Interlake Mecalux. b. In good condition. c. Properly maintained.


(3) Beam safety factor conforms to current RMI standards (RMI specs). The allowable distributed load per pair of beams is based on a maximum deflection of L/180 (1/180th of beam span).

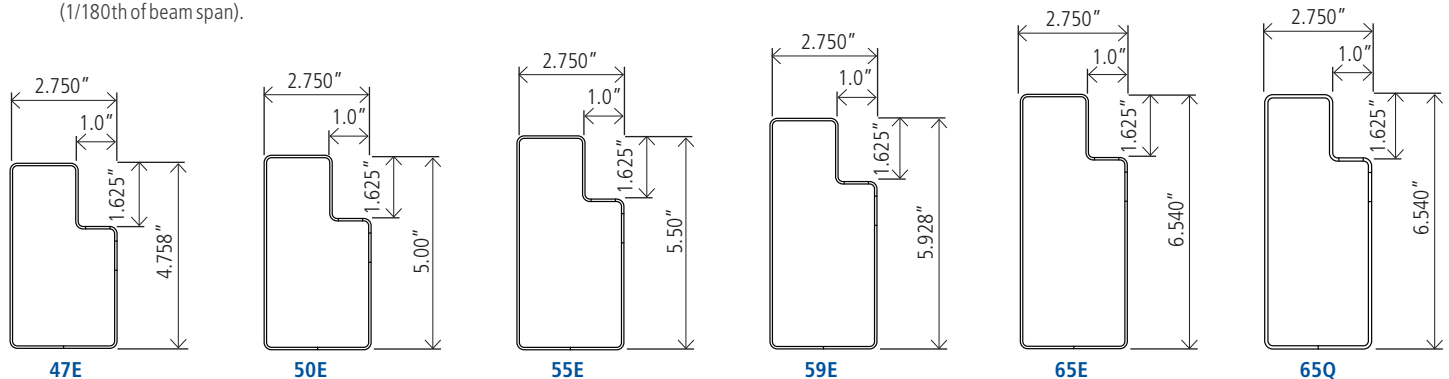



## Z Beams

Z beams are a lighter capacity beam designed to support particle board or wire decking. Named "Z" because of the profile, Z beams are used in the construction of picking areas. They are available with a 3-pin tear drop connection to fit securely within a selective bay.

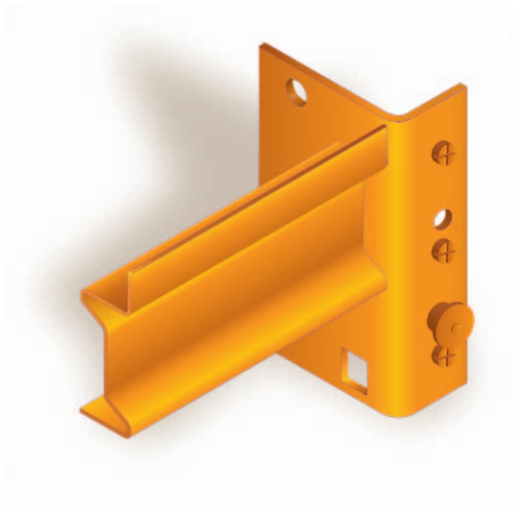


**ZS Beams-U65 = 14 ga**  
For use with wire decking

Z Beam Capacity (lbs per pair)		
Span	ZS-U60	ZS-U65
54"	3,800	-
60"	3,600	-
72"	3,000	1,985
78"	2,800	1,808
84"	2,600	1,742
90"	2,600	1,654
92"	2,400	1,566
96"	2,350	1,433
102"	2,220	-
108"	2,100	-




## Beam Weld Type Options

Beams are welded to the endplates by AWS certified welding technicians. Under normal, static loading conditions, the "A" weld is sufficient. The end plates are welded to the beam along the front and rear face of the beam edge. For certain seismic loading conditions, "D" welds are also available.



"A" Type Weld



"D" Type Weld






## End Plates

The foundation of the Interlake Mecalux selective rack system is the unprecedented beam-to-upright connection offered in the Piston Lock automatic locking device. The stud design and column punching draw tighter together under load to create the industry's most secure connection while maximizing system capacity.

Our proprietary locking system engages automatically upon beam seating, making installation and re-profiling easier while protecting against accidental beam release. The piston lock is damage- and tamper-resistant, and stays snugly in place during use.

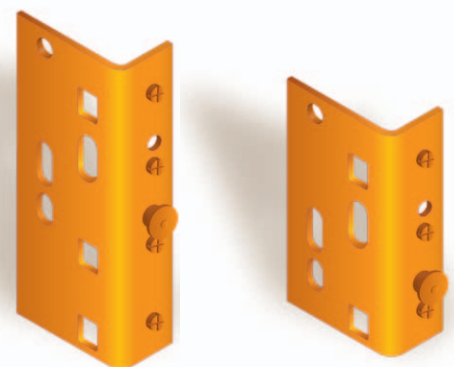




# Selective Rack Components

The Interlake Mecalux Selective Pallet Rack system provides an efficient use of floor space, load flexibility and easy reprofiling, all made possible through its extensive range of frame pieces and accessory components.

Welded frames have a powder coat finish in standard green. Bolted frames are painted standard blue with a cataphoretic paint process.

- 1/ Frame
- 2/ Beam
- 3/ Foot plate
- 4/ Horizontal strut
- 5/ Diagonal strut
- 6/ Shim
- 7/ Bolt on post protector
- 8/ End aisle protector
- 9/ Shelf panel
- 10/ Row spacer
- 11/ Roll-in pallet support
- 12/ Double flanged pallet support
- 13/ Drum/coil bed
- 14/ Fork clearance bar
- 15/ Skid channel
- 16/ Wall tie
- 17/ Drum cradle
- 18/ Corner protector
- 19/ Post protector

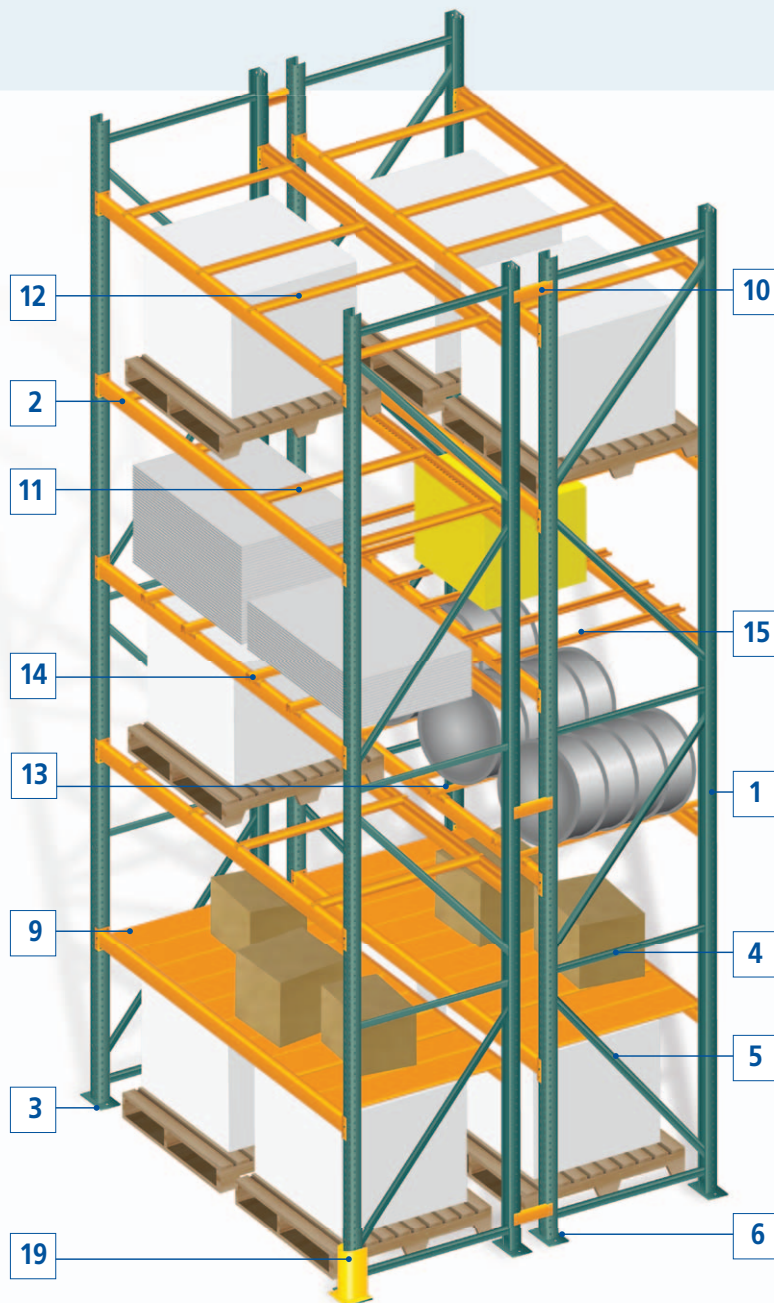


Welded Selective Pallet Rack

## Accessories

A variety of accessories are available for Selective Rack systems. From pallet supports to column protectors, Interlake Mecalux has accessories to meet any need. For a complete list of accessories, please contact your Interlake Mecalux representative.




End aisle protector



Post protector



Bolt on post protector




Welded and bolted row spacers





Welded and bolted wall ties



Corner protector

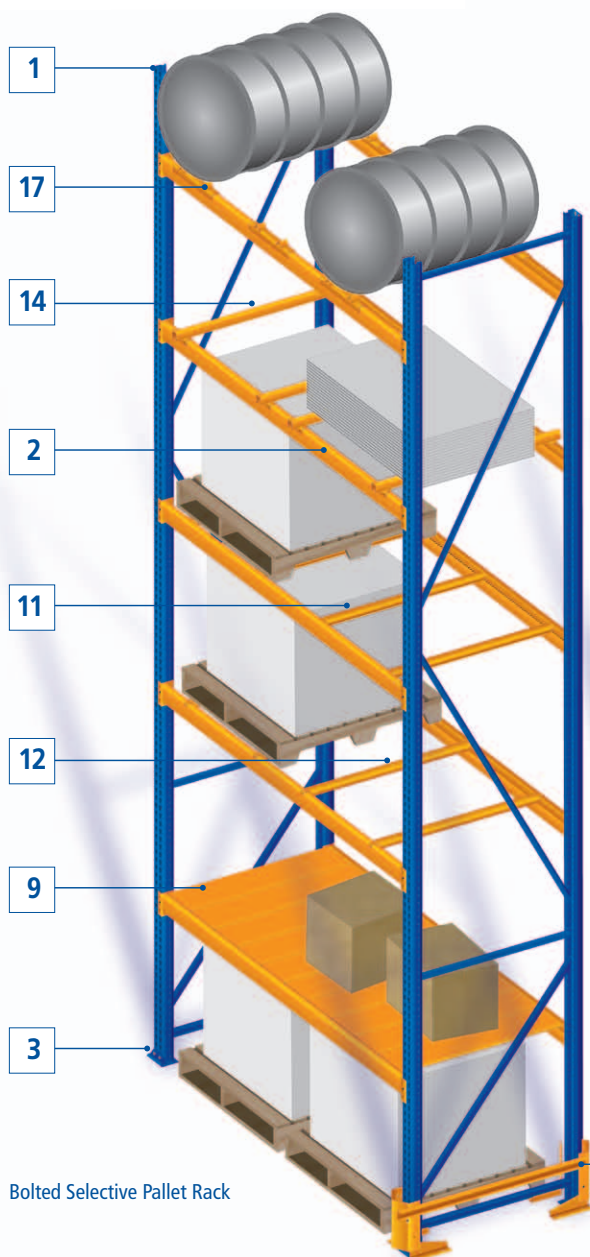

Bolted Selective Pallet Rack

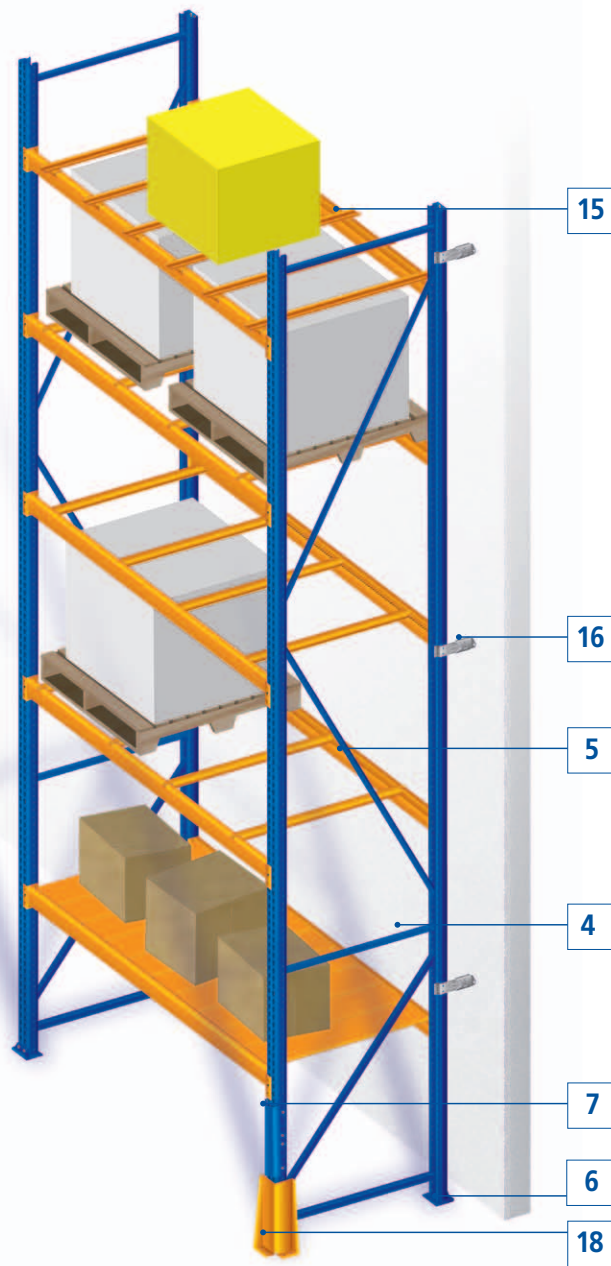



## SALES OFFICES

### CHICAGO

1600 N. 25th Ave.  
Melrose Park, IL 60160  
708-344-9999

### DALLAS

1520 Selene Drive  
Carrollton, TX 75006

### SAN DIEGO

8607 Ave de la Fuente  
San Diego, CA 92154

## PRODUCTION PLANTS

### CHICAGO

1600 N. 25th Ave.  
Melrose Park, IL 60160

### MATAMOROS

Las Rusias 2700, Industrial del Norte  
CP 87470 Matamoros,  
Tamps, MX

### PONTIAC

701 Interlake Drive  
Pontiac, IL 61764

### SUMTER

1925 Corporate Way  
Sumter, SC 29154

### TIJUANA

Blvd. Bellas Artes #9001  
Ciudad Industrial  
Tijuana, Baja California,  
MX 22500



info@interlakemecalux.com | www.interlakemecalux.com

1.877.632.2589



## OFFICES WORLDWIDE

Argentina, Belgium, Brazil, Canada, Chile,  
Czech Republic, France, Germany, Italy, Mexico,  
Panama, Peru, Poland, Portugal, Spain, Turkey,  
United Kingdom, USA, Uruguay

